

NOTES:


MATERIAL:
 CAGE: NICKEL SILVER, THICKNESS 0.25mm
 CONNECTOR:
 PLASTIC HOUSING: HIGH TEMPERATURE LCP, UL94 V-0.
 SPRING: STAINLESS STEEL, THICKNESS 0.20mm
 CONTACTS: PHOSPHOR BRONZE, THICKNESS 0.20mm
 PLATING: 15μ" MIN. GOLD ON MATING AREA,
 150μ" MIN. MATE TIN ON SOLDER TAILS.

PACKAGING: TRAY PACKAGING.

TEMPERATURE RANGE: -40°C TO +85°C

TITLE				佛山市寰威通信科技有限公司							
SFP 2X1 CAGE+CONNECTOR				PART NO.		GENERAL TOLERANCE		UNIT:MM		SIZE: A4	
				HT10-1N3A230-00B							
DRAW		Iror		DATE		2017-01-05		.X±0.20		.X±1'	
CHECK		Iror		DATE		2017-01-05		.XX±0.15		.XX±5'	
APPROVE		Victor		DATE		2017-01-05		.XXX±0.10		SCALE: 1:1	
								SHEET:1/3		REV:A	

RoHS COMPLIANT

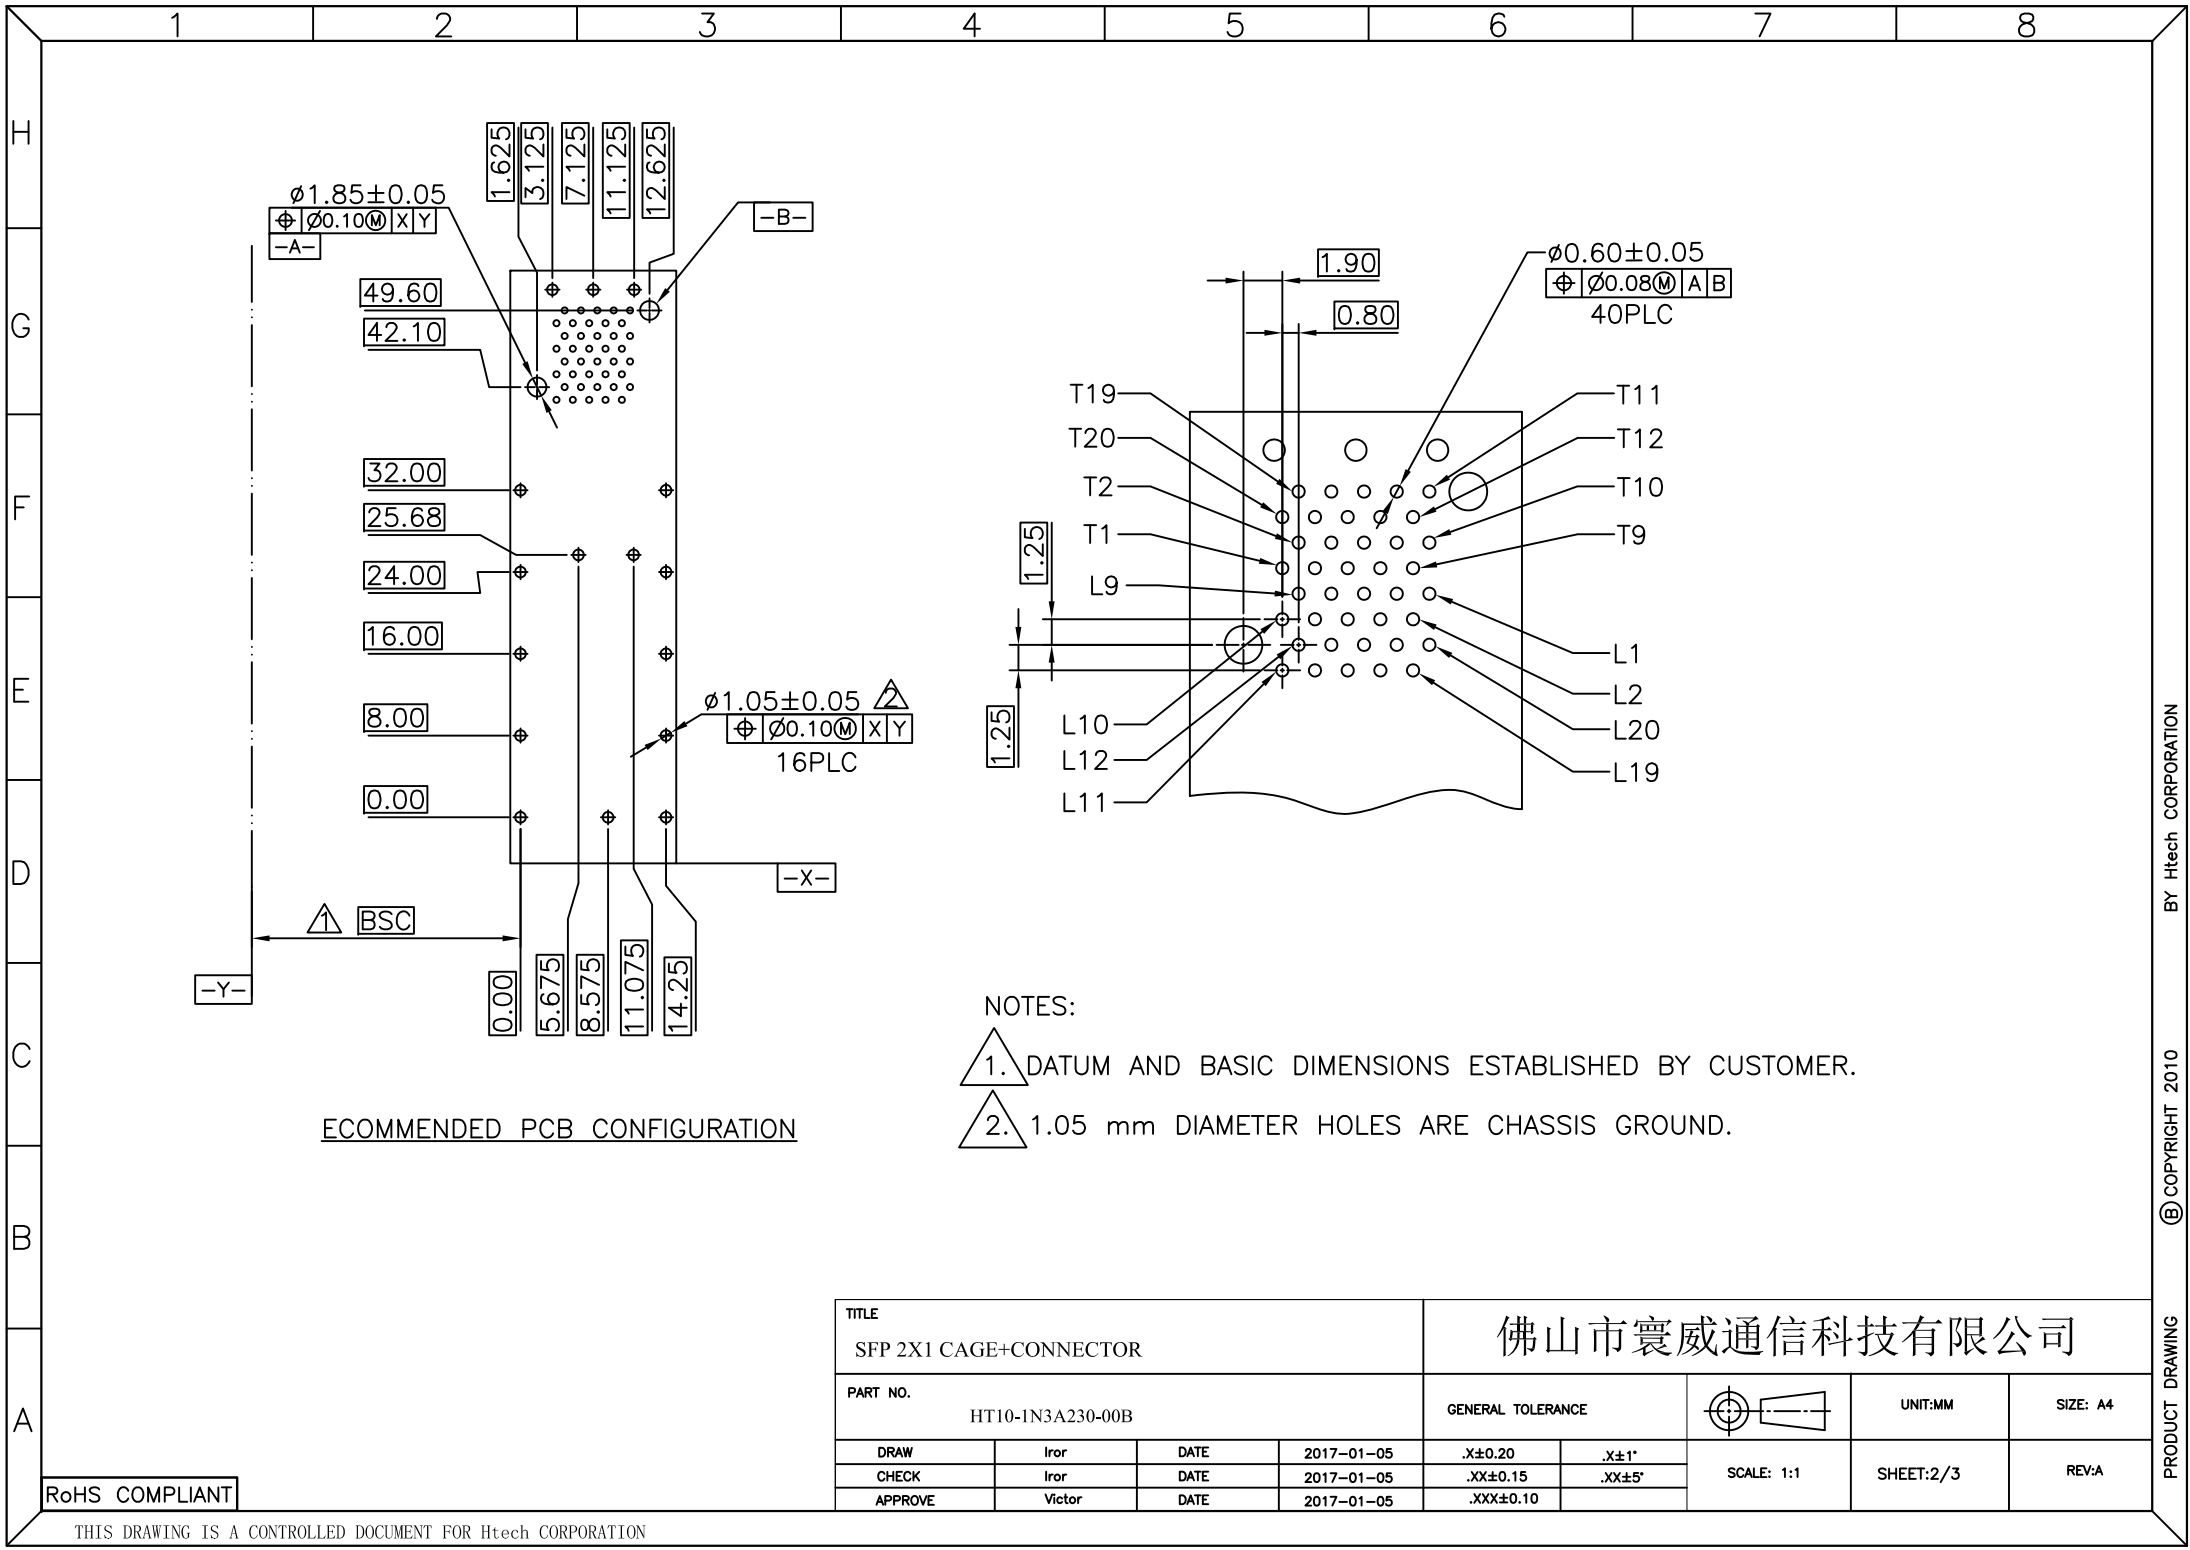


ECOMMENDED PCB CONFIGURATION

NOTES:

1. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
2. 1.05 mm DIAMETER HOLES ARE CHASSIS GROUND.

TITLE				佛山市寰威通信科技有限公司					
SFP 2X1 CAGE+CONNECTOR									
PART NO.				GENERAL TOLERANCE				UNIT:MM	SIZE: A4
HT10-1N3A230-00B									
DRAW	Iror	DATE	2017-01-05	.X±0.20	.X±1'	SCALE: 1:1		SHEET:2/3	REV:A
CHECK	Iror	DATE	2017-01-05	.XX±0.15	.XX±5'				
APPROVE	Victor	DATE	2017-01-05	.XXX±0.10					

RoHS COMPLIANT

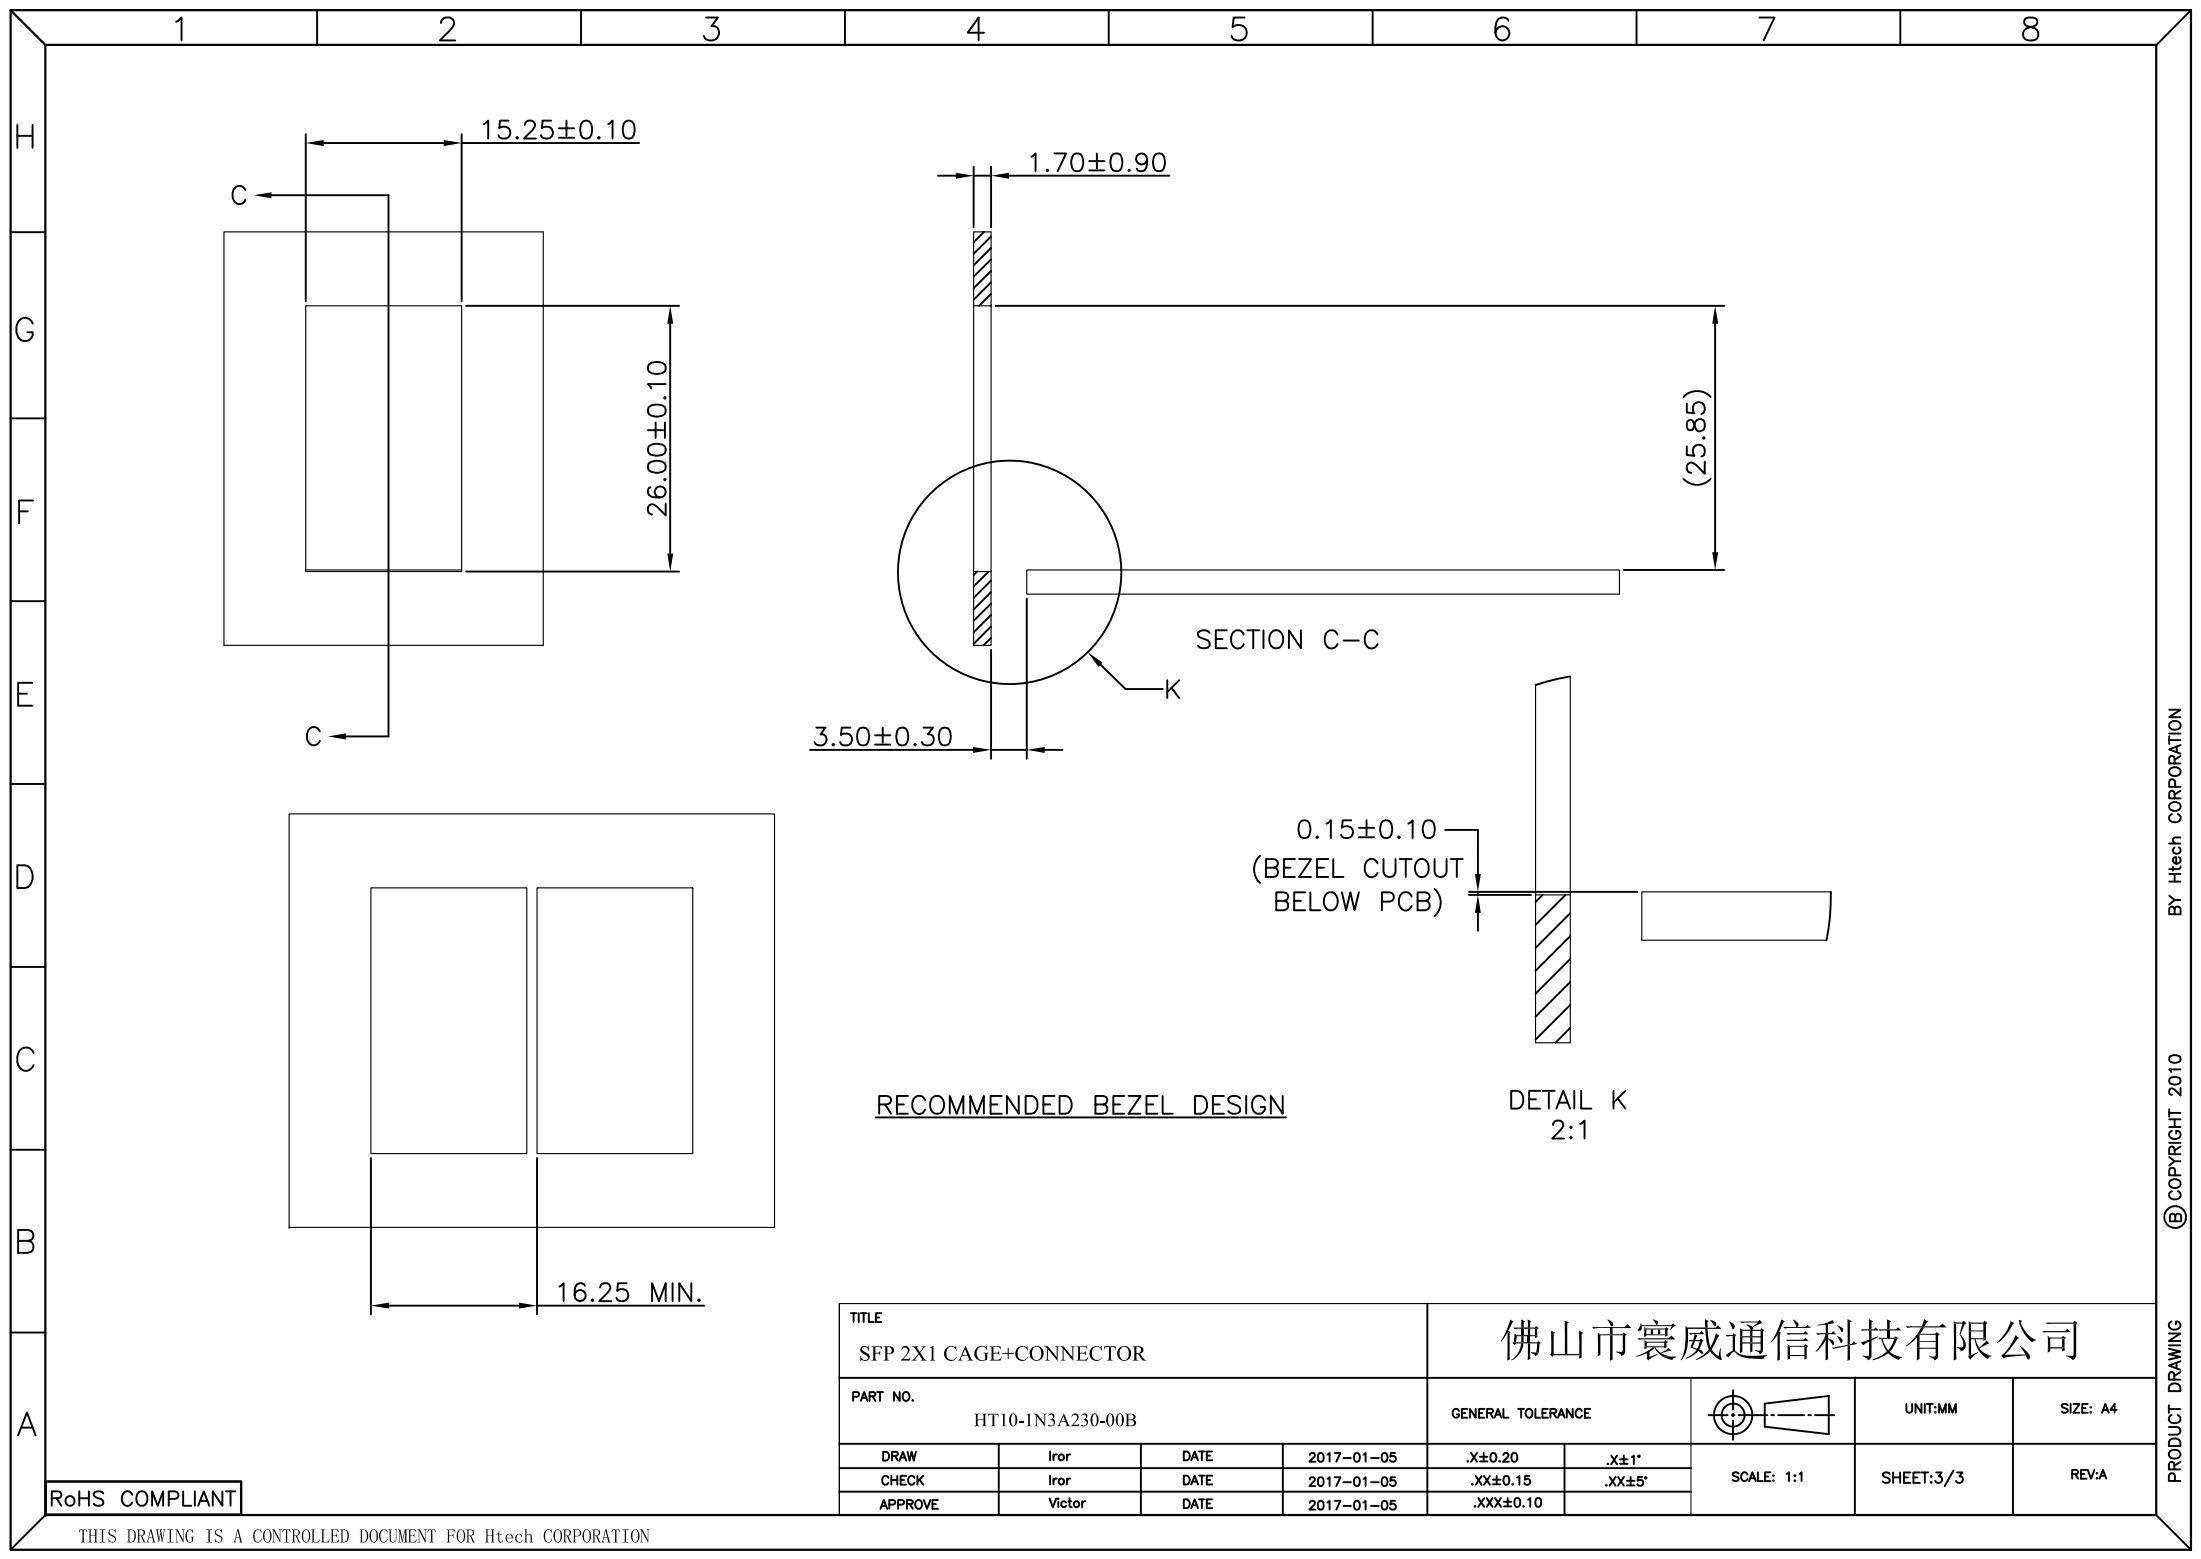

RECOMMENDED BEZEL DESIGN

DETAIL K
2:1

TITLE SFP 2X1 CAGE+CONNECTOR				佛山市寰威通信科技有限公司				
PART NO. HT10-1N3A230-00B				GENERAL TOLERANCE			UNIT:MM	SIZE: A4
DRAW	Iror	DATE	2017-01-05	.X±0.20	.X±1°	SCALE: 1:1	SHEET:3/3	REV:A
CHECK	Iror	DATE	2017-01-05	.XX±0.15	.XX±5°			
APPROVE	Victor	DATE	2017-01-05	.XXX±0.10				

RoHS COMPLIANT