


NOTES:

- 1.MATERIAL: NICKEL SILVER, THICKNESS 0.25mm
- 2.PACKAGING: TRAY PACKAGING
- 3.TEMPERATURE RANGE: -55°C TO +85°C

TITLE				佛山市寰威通信科技有限公司							
SFP+ 1X1 CAGE WITH GROUNDING PIN				PART NO.		GENERAL TOLERANCE		UNIT:MM		SIZE: A4	
				HT10-2N31220-00N							
DRAW		Iror		DATE		2016-12-09		.X±0.20		.X±1'	
CHECK		Iror		DATE		2016-12-09		.XX±0.15		.XX±5'	
APPROVE		Victor		DATE		2016-12-09		.XXX±0.10		SCALE: 1:1	
								SHEET:1/3		REV:A	

RoHS COMPLIANT

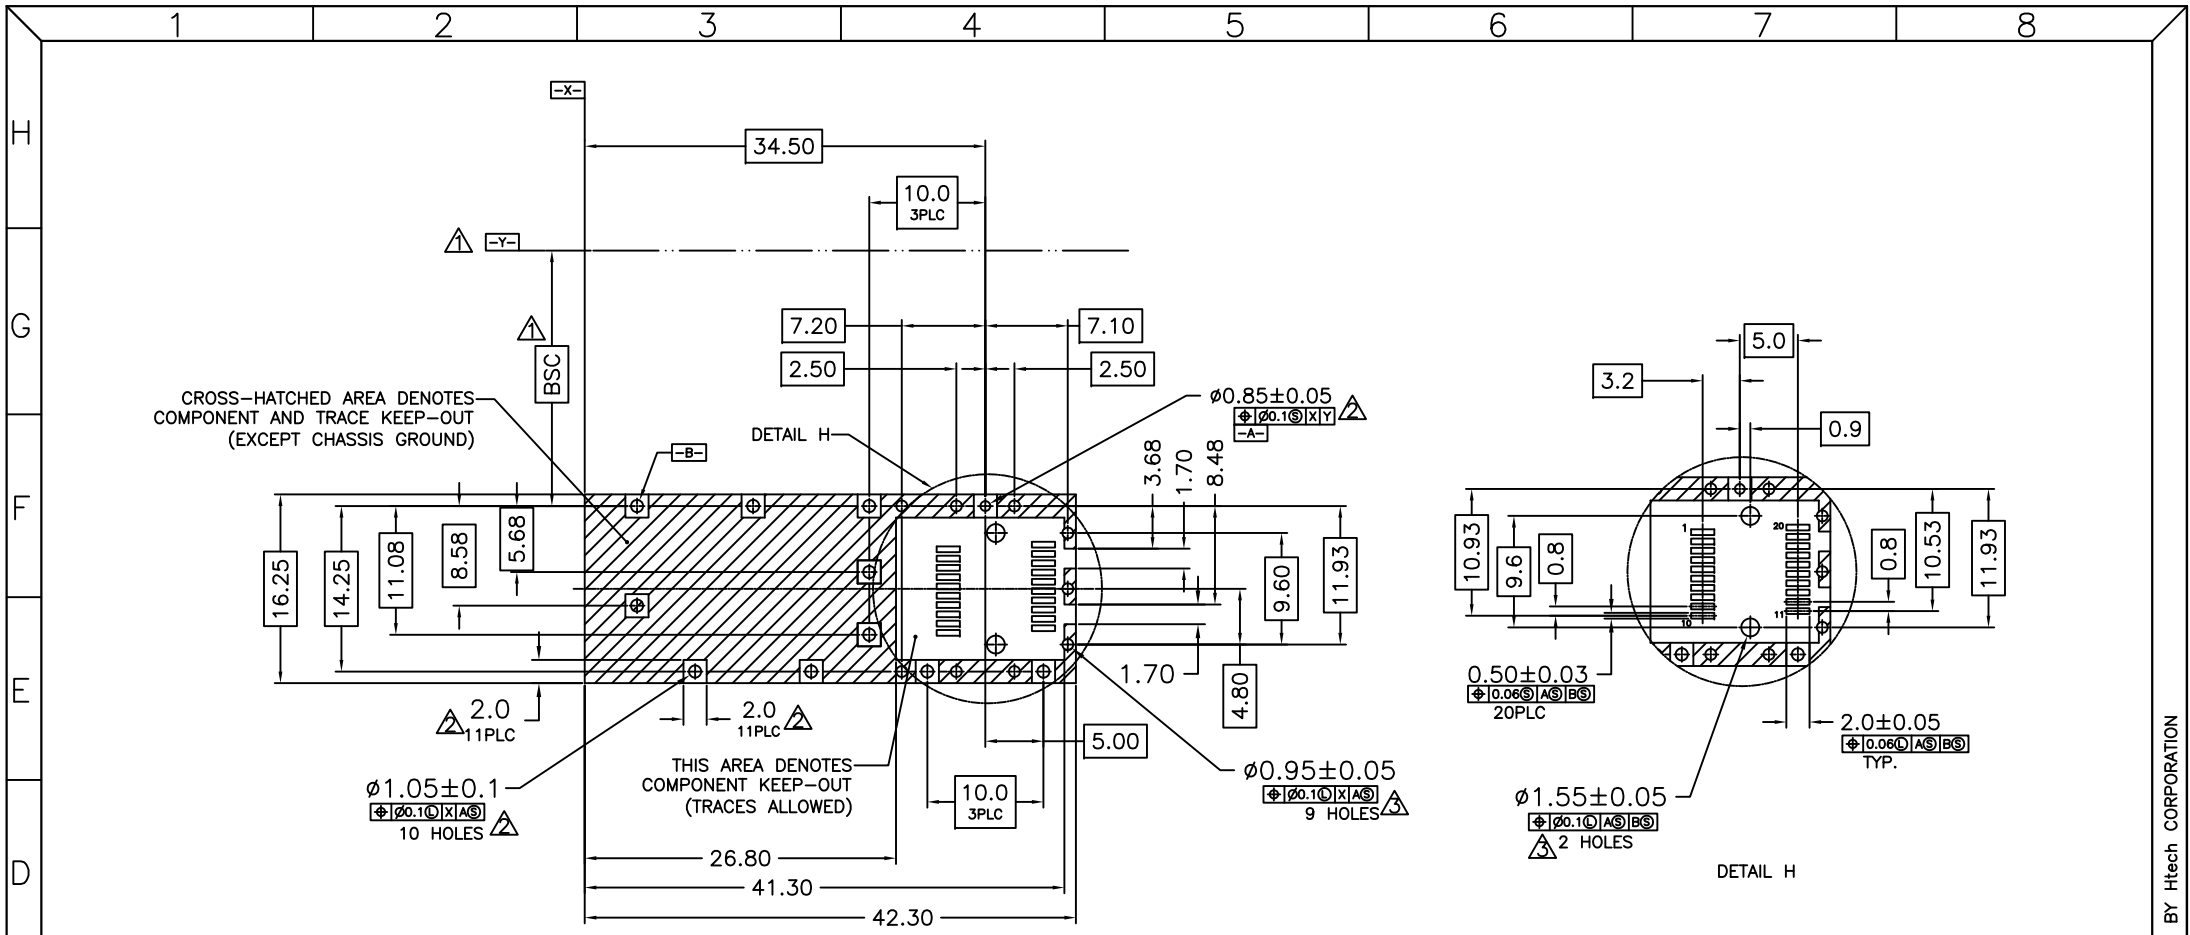


ECOMMENDED PCB CONFIGURATION

NOTES:

- ① DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- ② PADS AND VIAS ARE CHASSIS GROUND, 11 PLACES
- ③ THRU HOLES, PLATING OPTIONAL

TITLE SFP+ 1X1 CAGE WITH GROUNDING PIN				佛山市寰威通信科技有限公司				
PART NO. HT10-2N31220-00N				GENERAL TOLERANCE			UNIT:MM	SIZE: A4
DRAW	Iror	DATE	2016-12-09	.X±0.20	.X±1'	SCALE: 1:1	SHEET:2/3	REV:A
CHECK	Iror	DATE	2016-12-09	.XX±0.15	.XX±5'			
APPROVE	Victor	DATE	2016-12-09	.XXX±0.10				

RoHS COMPLIANT

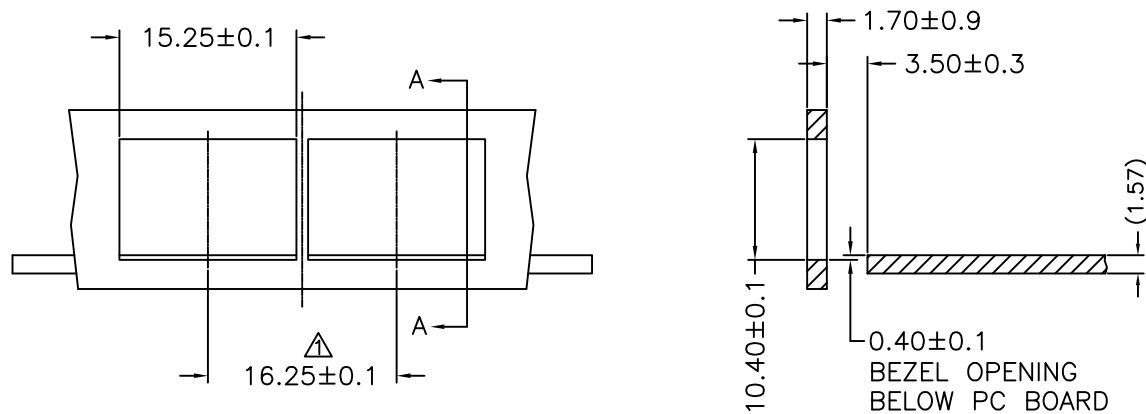

RECOMMENDED BEZEL DESIGN

NOTES:
 ▲ MINIMUM PITCH ILLUSTRATED, ENGLISH DIMENSIONS ARE FOR REFERENCE ONLY

TITLE				佛山市寰威通信科技有限公司							
SFP+ 1X1 CAGE WITH GROUNDING PIN				PART NO.		GENERAL TOLERANCE		UNIT:MM		SIZE: A4	
HT10-2N31220-00N											
DRAW	Iror	DATE	2016-12-09	.X±0.20	.X±1°	SCALE: 1:1		SHEET:3/3		REVA	
CHECK	Iror	DATE	2016-12-09	.XX±0.15	.XX±5°						
APPROVE	Victor	DATE	2016-12-09	.XXX±0.10							

RoHS COMPLIANT